



LED ballast MR16



Power
Consumption

Dimension

Voltage

Part No.

CCT
($\pm 300\text{K}$)

LUX
(1m)

Lighting
Angle

Lamp
Holder



7 W



50 ($\varnothing$) * 50 (H) mm

AC100V
AC240V

SYM07-CW-40
SYM07-WW-40

F6500
F3000


600($\pm 10\%$)
550($\pm 10\%$)

45°


GU5.3

AC Direct access /easy to install

(a) Original configuration

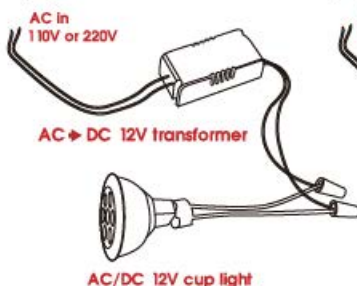

(b) Remove electronic ballast

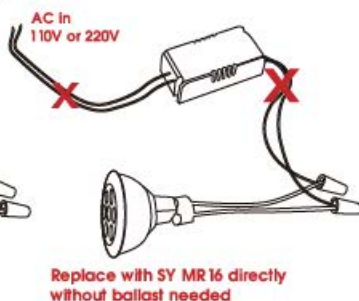

(c) Complete configuration modification

